

DUPLEXbase PT 1800

DUPLEXbase PT



PERFORMANCE

Fans		Supply Air	Extract Air
Air volume @200Pa	m ³ /hr / l/sec	1800 / 500	1800 / 500
Nominal voltage	V	230	230
Power input (at operation point)	kW	0.49	0.44
Max power input	kW	0.78	0.78
Max current	A	3.9	3.9
SFP	W/l/s	0.97	0.87
Fan type		EC	EC

Note: The figures above have been measured at 1800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

The unit consist of fans equipped with the EC technology. These fans have modulating speed control throughout the marked area.

Heat Recovery		Supply Air	Extract Air
Air volume @200Pa	m ³ /hr / l/sec	1800 / 500	1800 / 500
Temperature at inlet	°C	-5	20
Temperature at outlet	°C	16	3
Humidity at inlet	% RH	90	40
Humidity at outlet	% RH	20	100
Heat recovery efficiency winter / summer	%	83 / 79	
Performance in winter / summer	kW	12.9 / 2.9	
Condensation	l/h	2.8	
Type of heat exchanger		Counterflow, Plastic	
Part No.		90001427	

Note: The figures above have been measured at 1800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

Sound Power Level LWA (dB)	Total	dB (A)							
		63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
Outdoor air e1	60	54	44	54	51	51	51	33	<25
Supply air e2	81	57	62	76	76	74	69	63	57
Extract air i1	59	54	44	54	51	50	51	31	<25
Exhaust air i2	79	55	60	75	75	72	68	61	56
Breakout noise	59	36	39	58	42	45	41	39	<25
Sound Pressure Level LpA (dB) measured at 3m	39	<25	<25	38	<25	25	<25	<25	<25

Note: The figures above have been measured at 1800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

KEY FEATURES


- Air volume up to 1800 m³/h at 200 Pa according to ErP 2018
- Excellent thermal efficiency, up to 90%
- Compact design and high flexibility in unit orientation
- Low SFP with energy saving EC fans
- Low noise, refer to NR35 and BB93 standards
- Excellent thermal insulation (class T2, TB1)
- 100% adjustable digital controller with Internet and BMS connection
- BREEAM, Part L, Volume 2 and ErP 2018 compliant
- 2 year warranty+

OPTIONAL FEATURES


- Modulating control based on flow (constant flow function)
- Modulating control based on pressure (0-10V input)
- Pre and post-heating coils
- Cooling coils
- CO₂ monitors

More options available using our Duplexvent selection software.

AIR FLOW CURVE

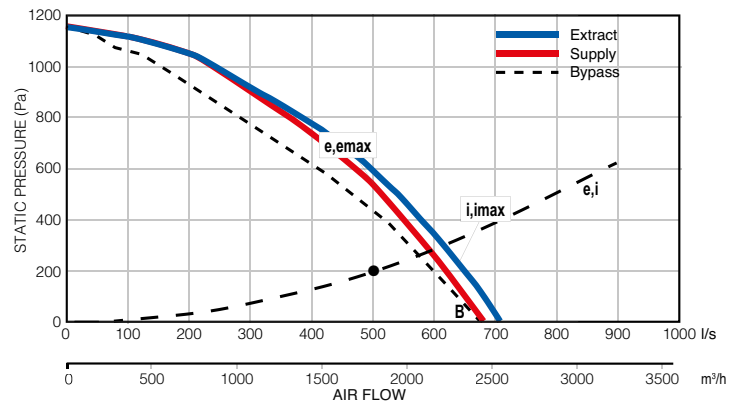


POWER CONSUMPTION

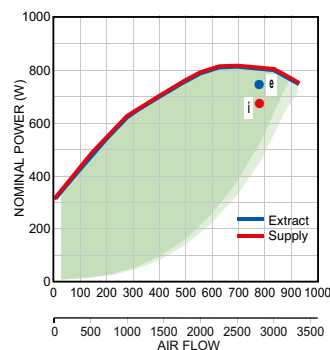

Note: Green area denotes power consumption range. Power consumption depends on system installation.


+excludes motors. Motor warranty one year from date of purchase.

HEAT RECOVERY EFFICIENCY

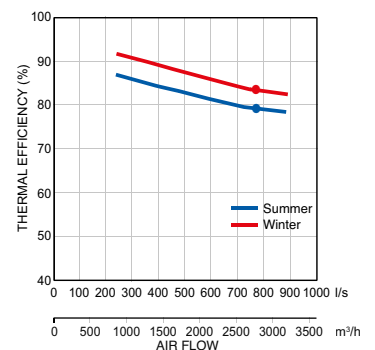


Winter Operation:

e1 - outdoor air (ODA) i1 - extract air (ETA)
 e2 - supply air (SUP) i2 - exhaust air (EHA)

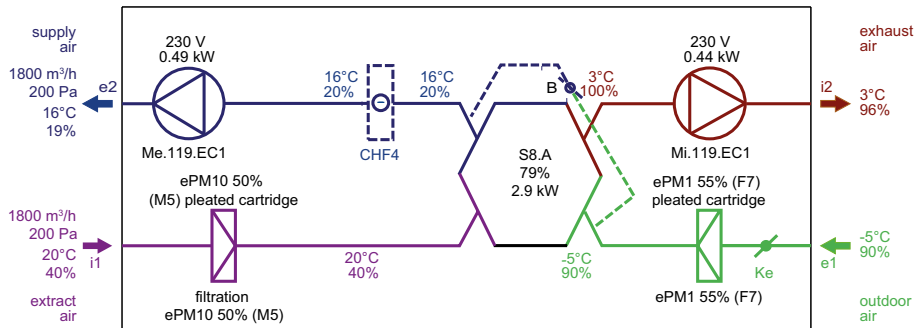

Note: AHU functions diagram. Inlet and outlet location may differ from actual position and port configuration.

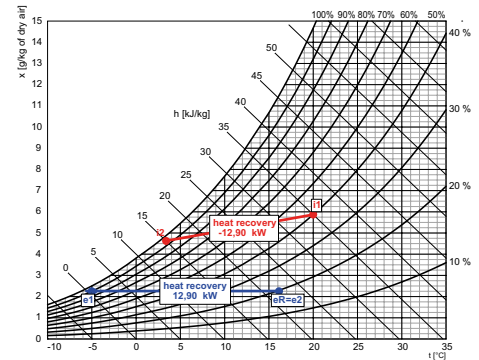

Supply


Description	t [°C]	RH [%]
e1 Outdoor Air	-5.0	90
eR Heat Recovery	16.3	19

Exhaust


Description	t [°C]	RH [%]
i1 Extract Air	20.0	40
i2 Heat Recovery	3.2	96

Summer Operation:

e1 - outdoor air (ODA) i1 - extract air (ETA)
 e2 - supply air (SUP) i2 - exhaust air (EHA)

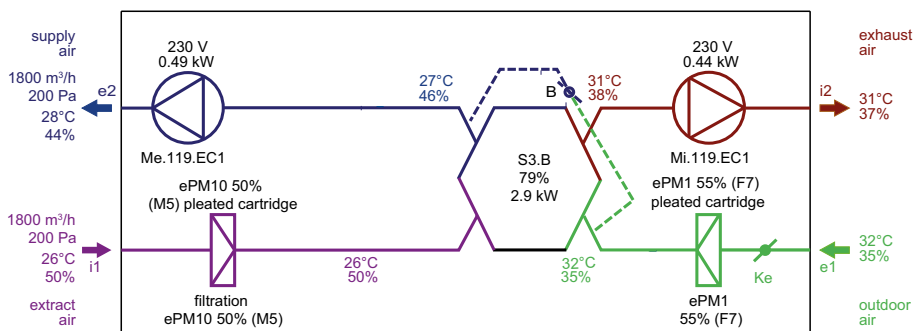

Note: AHU functions diagram. Inlet and outlet location may differ from actual position and port configuration.

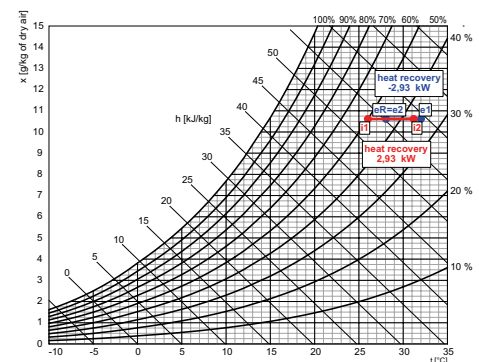

Supply

Description	t [°C]	RH [%]
e1 Outdoor Air	32.0	35
eR Heat Recovery	28.0	44

Exhaust

Description	t [°C]	RH [%]
i1 Extract Air	26.0	50
i2 Heat Recovery	31.2	37

DUPLEXbase PT 1800


DUPLEXbase PT

OPTIONAL ACCESSORIES

PRE-HEATING

Electric pre-heater		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	1800 / 500
Max. heating capacity	kW	4.4
Voltage	V	400
Heating coil type		built-in

Electric pre-heater		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	1800 / 500
Max. heating capacity	kW	6
Voltage	V	400
Connection ports	mm	Ø 315
Heating coil type		external

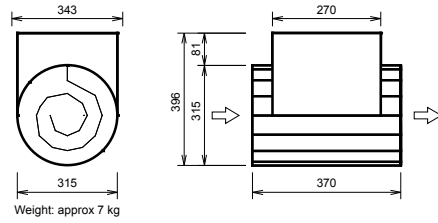


POST HEATING

Electric post-heater		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	1800 / 500
Temperature at inlet (upstream of heater)	°C	16
Temperature at outlet (downstream of heater)	°C	19
Heating capacity	kW	2.3
Max. heating capacity	kW	4.0
Voltage	V	400
Heating coil type		built-in



Water heating coil		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	1800 / 500
Temperature at inlet (after heat recovery)	°C	16
Temperature at outlet (downstream of heater)	°C	19
Heating capacity	kW	2.2
Heating medium temperature drop	°C	70 / 19
Medium flow (from source)	l/h	38
Medium-side pressure drop in heat exchanger / in valve	kPa	5.60 / 0.33
Connection dimension (hydraulic kit)		1" female
Coil capacity	l	2.2
Heating coil type		built-in

Electric post-heater		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	1800 / 500
Temperature at inlet (upstream of heater)	°C	16
Temperature at outlet (downstream of heater)	°C	20
Heating capacity	kW	2.3
Max. heating capacity	kW	6
Voltage	V	400
Connection ports	mm	Ø 315
Heating coil type		external

Note: The figures to the left have been measured at 1800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

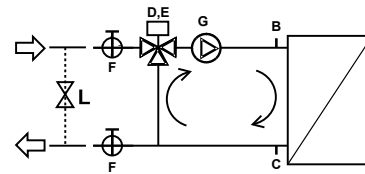

- B Sludge valve plug 2)
 - C Sludge valve plug 2)
 - Hydraulic kit: RE-HW3.LM24A-SR**
 - D Mixing valve IVAR.MIX4, Kv 12, 1" 1)
 - E Actuator LM24A-SR 1)
 - F Globe valve 1" female 1)
 - G Pump WILO YONOS PARA RS 20/6- RKC 1)
 - Others**
 - L Water bypass 3)
- 1 - Delivered separately
2 - Fitted and connected
3 - Not part of delivery, recommended

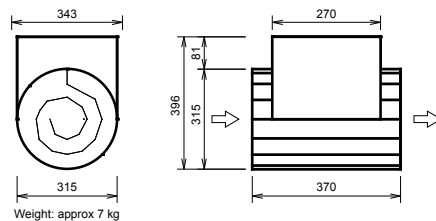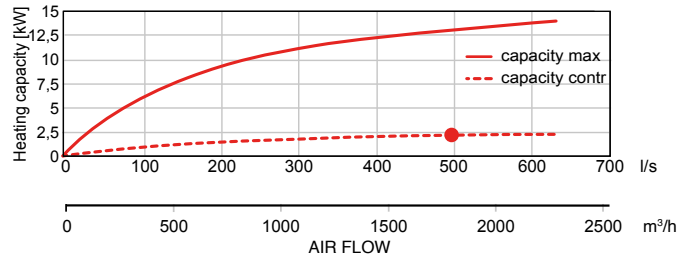

DUPLEXbase PT 1800


DUPLEXbase PT

POST HEATING continued



Water heating coil		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	1800 / 500
Temperature at inlet (after heat recovery)	°C	16
Temperature at outlet (downstream of heater)	°C	20
Heating capacity	kW	2.3
Heating medium temperature drop	°C	70 / 20
Medium flow (from source)	l/h	39
Medium-side pressure drop in heat exchanger / in valve	kPa	2.40 / 0.38
Connection dimension (hydraulic kit)		1" female
Coil capacity	l	2.0
Heating coil type		external
Connection dimension		1" female

Note: The figures above have been measured at 1800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

OPTIONAL ACCESSORIES




- B Sludge valve 2)
 - C Sludge valve 2)
 - Hydraulic kit: R-CW3.TR 24-SR
 - D 3-way ball valve R320BM, Kv 21,3/4" 1)
 - E Actuator TR 24-SR 1)
 - F Globe valve 1" female 1)
 - Others
 - G Pump 3)
 - L Water bypass 3)
 - K Coil water/ethylene glycol 3)
- 1 - Delivered separately
2 - Fitted and connected
3 - Not part of delivery

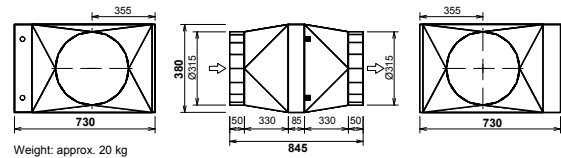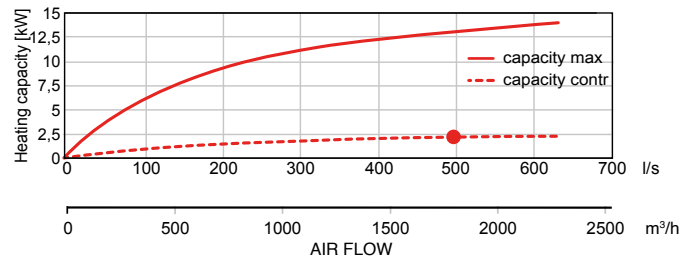


COOLING

Water cooling coil		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	1800 / 500
Temperature at inlet (after heat recovery)	°C	27
Temperature at outlet (downstream of cooling coil)	°C	17
Inlet relative humidity (after heat recovery)	% RH	46
Outlet relative humidity (downstream the cooling coil)	% RH	84
Cooling capacity	kW	7
Condensate production	l/h	1
Water temperature drop	°C	6 / 13
Medium flow (at max. capacity)	l/h	910
Medium-side pressure drop in heat exchanger / in valve	kPa	35.10 / 0.14
Connection dimension		1" female
Coil capacity	l	2.3
Heating coil type		built-in

Note: The figures above have been measured at 1800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

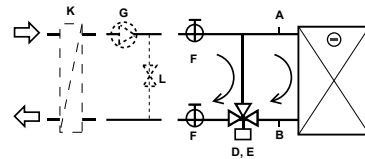


- A Sludge valve plug 2)
 - B Sludge valve plug 2)
 - Hydraulic kit: R-CW3.TR 24-SR
 - D 3-way ball valve R320BM, Kv 21,3/4" 1)
 - E Actuator TR 24-SR 1)
 - F Globe valve 1" female 1)
 - Others
 - G Pump 3)
 - L Water bypass 3)
 - K Coil water/ethylene glycol 3)
- 1 - Delivered separately
2 - Fitted and connected
3 - Not part of delivery, recommended

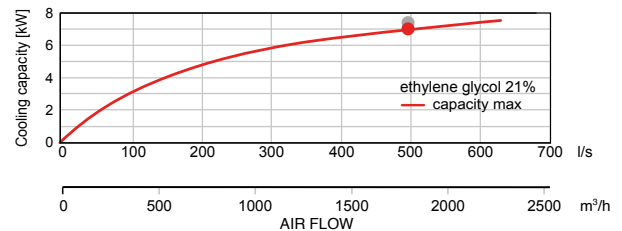

DX COIL

DX coil		Supply
Air volume @200Pa	m³/hr / l/sec	1800 / 500
Temperature at inlet (after heat recovery)	°C	27
Temperature at outlet (downstream of cooling coil)	°C	16
Inlet relative humidity (after heat recovery)	% RH	46
Outlet relative humidity (downstream the cooling coil)	% RH	84
Cooling capacity	kW	7.71
Condensate production	l/h	2
Refrigerant type		R32
Evaporating temperature	°C	10
Coil capacity	l	3.0
Heating coil type		built-in


COOLING CAPACITY

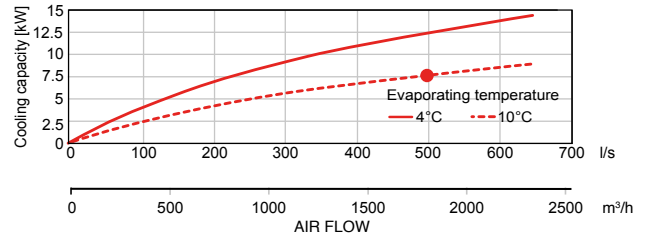

Note: The figures above have been measured at 1800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

DIMENSIONS

AHU size length 2150 mm
 height (without AHU feet) 1600 mm
 depth 680 mm
 Weight approx. 409 kg

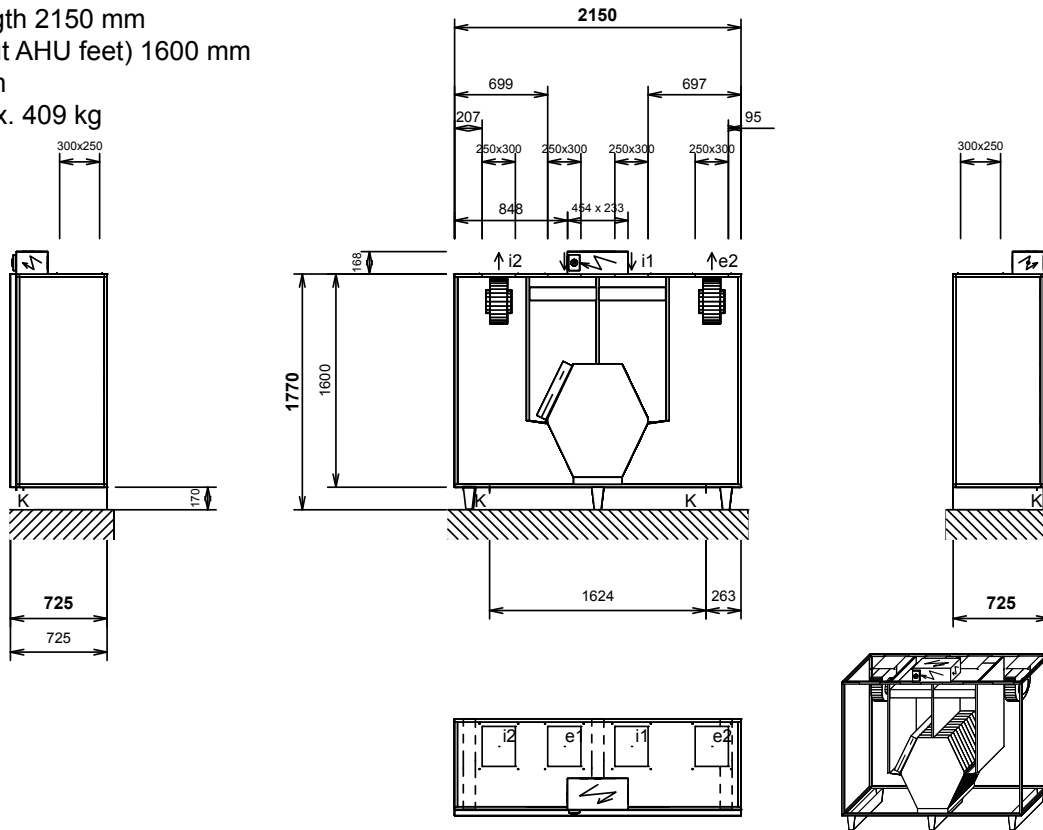

Connections	Type	Dimensions	Optional components
e1	e1- outdoor air (ODA)	250 x 300 mm	shutoff damper
e2	e2- supply air (SUP)	250 x 300 mm	4x M6 thread for 20 mm flange
i1	i1- extract air (ETA)	250 x 300 mm	4x M6 thread for 20 mm flange
i2	i2- exhaust air (EHA)	250 x 300 mm	4x M6 thread for 20 mm flange
K	condensate drain	2x Ø 16 mm / 22 mm	

Notice:

- Door – 2 parts
- Diagram is intended only for basic information, binding dimensions receive at device delivery, or on request from the manufacturer.
- Bolt holes for duct connection (for one port): 4x M6

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
 Aidelle House, Lancaster Road,
 Cressex Business Park,
 High Wycombe, Buckinghamshire,
 United Kingdom, HP12 3QP

E-mail: info@airflow.com
 Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request

