

Aura eco 125

Toilet, en-suite and bathroom ventilation



KEY FEATURES

- Axial fan
- Ventilation up to 115 m³/h
- Slim compact styling
- Quick and easy to fit
- Quiet - 31 dB(A)
- Low Watt motor - 9.3 W
- Low SFP - 0.26 W/l/s
- Compatible with 125 mm ducting
- IPX4 rating
- Complies with Building Regulations
- 2 year warranty



Aura eco 125 range

Highly reliable, low energy fan in a modular design for ease of installation and maintenance. The Aura eco 125 is designed to provide quiet extraction for cloakroom applications. Recessed into a wall the Aura eco 125 provides slim, compact and discreet extraction for the property. With protection in mind, the Aura eco 125 comes with IPX4 ingress protection enabling installation anywhere within Zone 2 or in Zone 1 when installed above a fixed shower head.

Available with various control options; basic switching for on/off operation using an external switch; adjustable timer with fan activation via an external switch and an adjustable overrun between 2 and 30 minutes. Adjustable humidity timer enables activation of the fan via the use of an adjustable humidity sensor, 60 to 90% RH, or via a remote switch with an adjustable timer overrun of 2 to 30 mins. motion sensor time activates the fan with the use of an integral motion sensor with a timer overrun.



MODELS


Basic	Control by Remote Switch
Timer	Adjustable timer overrun between 2 and 30 minutes
Humidity Timer	Adjustable Humidity 60 to 90% RH with adjustable timer
Motion Sensor Timer	Motion sensor activation



TECHNICAL DATA


Specification	Aura eco 125B	Aura eco 125T	Aura eco 125HT	Aura eco 125MST
Air flow m³/h / l/s	115 / 32	115 / 32	115 / 32	115 / 32
Fan type	Axial	Axial	Axial	Axial
Controls	Basic	Timer	Humidity Timer	Motion Sensor Timer
Mounting	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling
Sound pressure dB(A)@3 m	31	31	31	31
Power Watts	9.3	9.3	9.3	9.3
Amps	0.060	0.060	0.060	0.060
Specific Fan Power (SFP)	0.26	0.26	0.26	0.26
Duct diameter (mm)	125	125	125	125
Voltage	230 V / 1 ph / 50-60 Hz	230 V / 1 ph / 50-60 Hz	230 V / 1ph / 50-60 Hz	230 V / 1 ph / 50-60 Hz
Rating	IP34	IP34	IP34	IP34
Material finish	Plastic	Plastic	Plastic	Plastic
Weight (kg)	0.7	0.7	0.7	0.7
Dimensions (H x W x D) mm	176 x 176 x 104	176 x 176 x 104	176 x 176 x 104	176 x 176 x 104
Part No.	90000532	90000533	90000534	90000535

DIMENSIONS (mm)

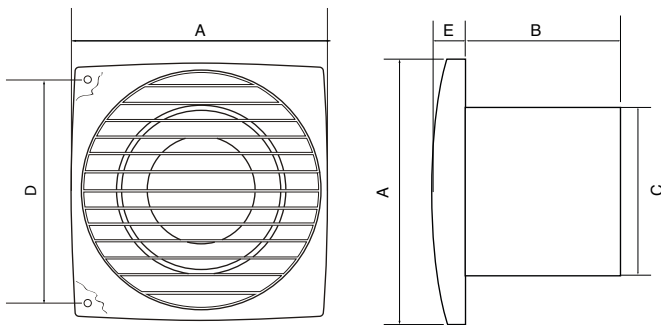

Model	A	B	C	D	E
Aura eco 125	176	101	125	140	13

PERFORMANCE

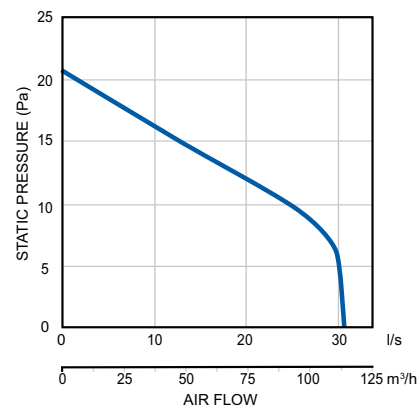

CONTROLS AND ACCESSORIES

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

See accessories section for more details.

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80001323 - Issue 1 01/23