Aventa In-line Plus

Bathroom, en-suite, utility room and kitchen ventilation

KEY FEATURES

- In-Line mixed flow fan with flow rate up to 157 l/s (565 m³/h)
- High pressure, low noise
- Two speed (normal and boost)
- Adjustable Run on Timer version available
- Low Watt motor from 42 W
- IPX4 rating
- 2 year warranty

The Aventa range of in-line fans provides a quiet, powerful and compact remote duct mounted ventilation solution. Units are available in high performance two speed versions. Less bulky than larger in-line centrifugal fans means flexibility of installation. Remote loft space or service shaft location etc is easily achieved.

With high flow/high pressure development characteristics they can be used with flexible ducting and flat duct systems to ensure compliance with Building Regulations guidance ensuring installed performance and extraction conditions are met.

Combining two Aventa fans allows for even more powerful operation. Mounting in parallel (left hand image on facing page) doubles the air flow, whilst two fans in series (right hand image on facing page) leads to a doubling of the air pressure for longer duct runs.

MODELS

Basic	Control by Remote Switch
Timer	Adjustable timer overrun between 2 and 30 minutes

TECHNICAL DATA

Specification	Aventa Plus 150	Aventa Plus 150T
Air flow m³/h	415 / 565	
Air flow l/s	115 / 157	
Fan type	Mixed Flow	
Controls	Basic	Timer
Mounting	In-Line	
Sound pressure dB(A)@3 m	32 / 44	
Power Watts	42 / 50	
Amps	0.19 / 0.22	
Building Regulations ADF	Yes	
Duct diameter (mm)	100	
Voltage	230 V / 1 ph / 50 Hz	
Rating	IPX4	
Material finish	Polypropylene	
Weight (kg)	2.95	
Dimensions (H x W x D) mm	247 x 220 x 289	
Part No.	90002371	90002372
EAN	5019009340319	5019009340326

DIMENSIONS (mm)



Model	Ø D	B	H	L
Aventa In-line Plus 150 / 150 T	148	220	247	289

Double the flow - mount in parallel



Double the pressure - mount in series



PERFORMANCE

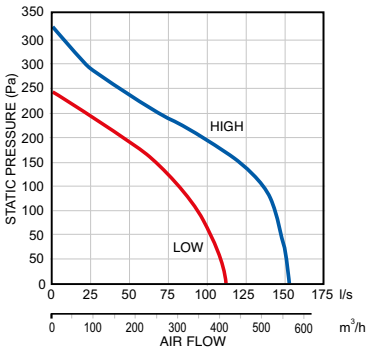

CONTROLS & ACCESSORIES

Ø150mm x 1M Round Rigid Duct No: 90000049

Ø150mm x 1M round rigid duct length manufactured from white PVC.

Ø150mm Rigid Duct Connector No: 90000058

Ø150mm round rigid duct connector with male spigots to connect Ø150mm rigid ducting lengths.

Ø150mm x 45° Round Bend No: 90001169

Ø150mm 45° round bend with male spigots.

Ø150mm 90° Round Bend No: 90000055

Ø150mm 90° round rigid bend with male spigots.

Others products available from **airflow.com**

Call: 01494 525252 **Visit: airflow.com**

80001927 - Issue 1 10/26

Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request

Certificate No. EMS 569454 BS EN ISO 14001 : 2015
Certificate No. FM 00152 BS EN ISO 9001 : 2015