

Duplexvent FLEXI DV3600

Flexi Line Side Entry -
Up to 5620 m³/h air volume



KEY FEATURES

- Air volume up to 3800 m³/hr @ 200 Pa
- Excellent heat recovery efficiency, up to 93%
- Versatile unit positioning with floor and ceiling suspended mounting options
- Low SFP with energy saving EC fans
- Low noise, refer to NR35 and BB93 standards
- 100% adjustable digital controller with internet and BMS connection
- BREEAM, Passive House and ErP 2016 / 2018 compliant
- 2 year warranty +

PERFORMANCE

Sound Power Level Lw (dB)	dB (A)	63	125	250	500	1 k	2 k	4 k	8 k
Outdoor air e1	50	67	65	46	36	35	28	<25	<25
Supply air e2	70	71	83	72	62	61	54	48	53
Extract air i1	50	66	65	45	38	34	28	<25	<25
Exhaust air i2	69	69	82	71	61	59	53	47	52
Breakout noise	54	56	67	56	49	44	35	<25	<25
Sound Pressure Level Ld	dB (A)	63	125	250	500	1 k	2 k	4 k	8 k
To the surrounding	33	36	46	36	28	<25	<25	<25	<25




Sound pressure level is measured at 3m distance

Ventilation		Supply Air	Extract Air
Maximum air volume @ 200 Pa	m ³ /h / l/s	3800 / 1055.55	3800 / 1055.55
Air volume @ 250 Pa*	m ³ /h / l/s	2000 / 556	2000 / 556
Nominal voltage	V	400	400
Voltage (at operation point)*	V	400	400
Nominal Power (at operation point)*	W	446	397
Max connection power	W	1480	1480
Max current	A	2.4	2.4
Filters		F7	M5
Fan type		EC	EC

* Note: ● The figures above have been measured at 2000 m³/h and 250 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.



Heat Recovery		Supply Air	Extract Air
Maximum air volume @ 200 Pa	m ³ /h / l/s	3800 / 1055.55	3800 / 1055.55
Air volume @ 250 Pa*	m ³ /h / l/s	2000 / 556	2000 / 556
Temperature at inlet*	°C	-10	22
Temperature at outlet*	°C	18	1
Humidity at inlet*	%rh	90	40
Humidity at outlet*	%rh	11	100
Thermal efficiency in winter / summer	%	88 / 84	
Performance in winter / summer	kW	19.4 / -2.3	
Condensation	l/h	6.5	
Type of heat exchanger		Counter Flow, Plastic	
Part No.		90000070	

* Note: ● The figures above have been measured at 2000 m³/h and 250 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

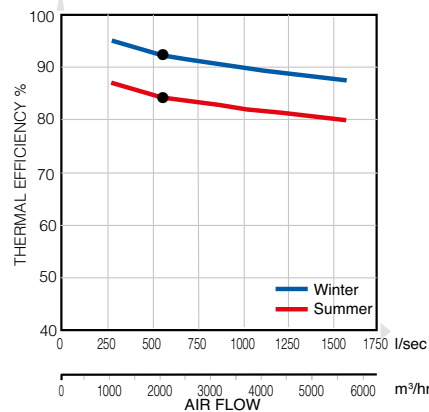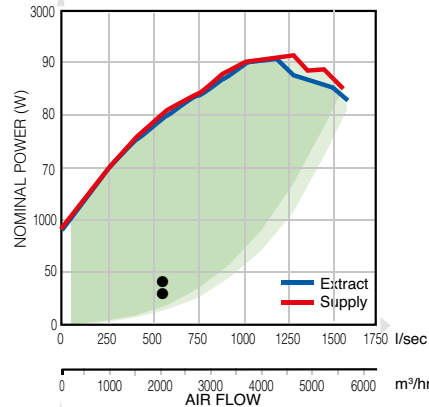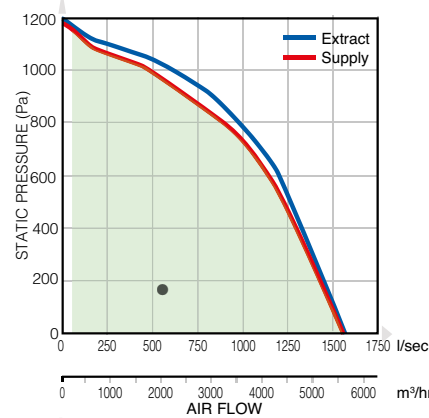

+ excludes motors. Motor warranty one year from date of purchase.







2016 / 2018

Winter Operation*

e1 - outdoor air (ODA)
e2 - supply air (SUP) i1 - extract air (ETA)
i2 - exhaust air (EHA)

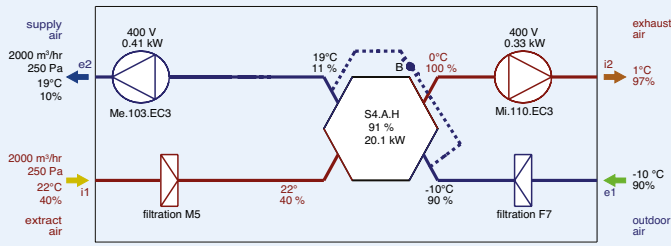

Note: AHU functions diagram. Inlet and outlet location may differ from actual position and port configuration.

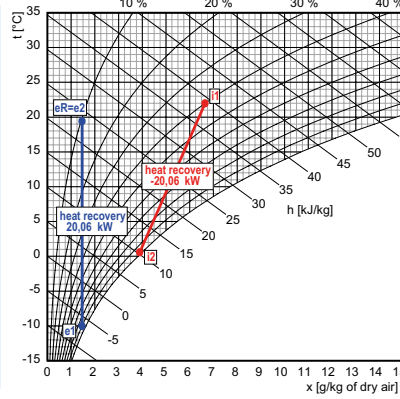

Supply


Description	t [°C]	rh [%]
e1 Outdoor Air	-10.0	90
e2 Supply Air	18.0	11

Exhaust


Description	t [°C]	rh [%]
i1 Extract Air	22.0	40
i2 Exhaust Air	1.0	100

Summer Operation*

e1 - outdoor air (ODA)
e2 - supply air (SUP) i1 - extract air (ETA)
i2 - exhaust air (EHA)

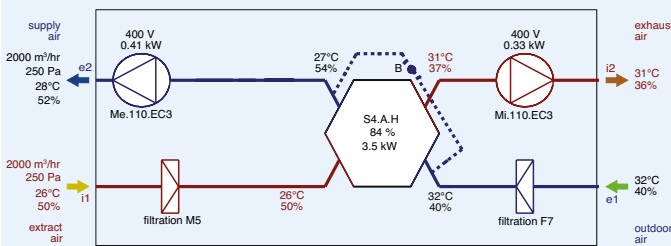

Note: AHU functions diagram. Inlet and outlet location may differ from actual position and port configuration.

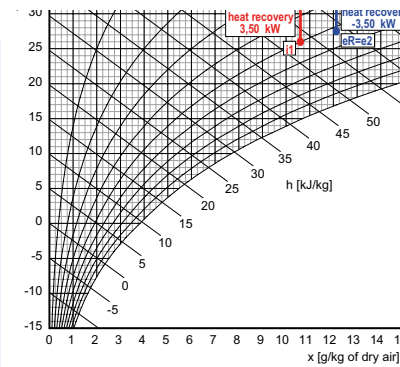


Supply

Description	t [°C]	rh [%]
e1 Outdoor Air	22.0	35
e2 Supply Air	25.0	29

Exhaust

Description	t [°C]	rh [%]
i1 Extract Air	26.0	50
i2 Exhaust Air	23.0	61

DIMENSIONS

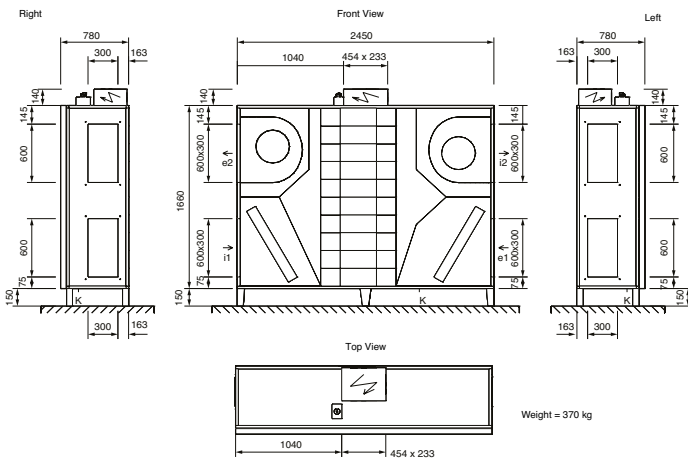

Connections	Type	Diameter	Accessories
e1	Outdoor Air	600 x 300 mm	Shut-off Damper, Flexible Connector
e2	Supply Air	600 x 300 mm	Flexible Connector
i1	Extract Air	600 x 300 mm	Flexible Connector
i2	Exhaust Air	600 x 300 mm	Flexible Connector
K	Condensate Outlet	Ø 21 mm	Condensate Trap

ACCESSORIES

See Duplexvent accessories pages for more details.

* The above figures are example performance measurements. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80000673 - Issue 2 12/22