


iCONsmart 30

Stylish toilet, bathroom and utility room ventilation

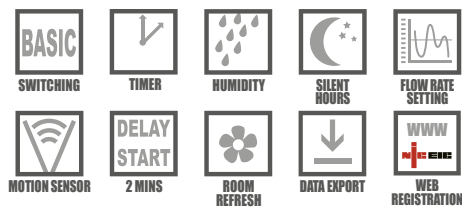

KEY FEATURES

- Flow rate up to 42 l/s - 151 m³/h
- Low energy consumption
- Ceiling or wall mounted
- Very quiet (The world's first Quiet Mark approved range)
- Digital micro multifunction modules: Timer, Humidity & Timer, Motion sensor & Timer, Motion sensor with Humidity & Timer
- Modules fit in all fan sizes
- IPX5
- App controlled via Bluetooth
- Real time fan data accessibility
- NICEIC paperless notification
- Silent shutter
- Complies with Building Regulations
- 5 Year guarantee


iCONsmart 30

iCONsmart is the next generation in the iCON range. Ceiling or wall mounted, it is stylish and unobtrusive, even in the smallest of rooms. The patented iris design reduces external noise ingress as well as preventing unwanted back draught into your dwelling. Bluetooth technology enables quick and easy commissioning using the myAirflow app. iCONsmart 30 is the middle size of the world's first quiet mark approved range.

iCONsmart is based on the original iCON Red Dot award winning design, bringing its legacy and style into the modern era. You have never been more in control of your


indoor air quality, with 3-months rolling data log of energy consumption, time-on and flow rates log as standard. An optional upgrade to allow live room humidity level and temperature monitoring when using the Humidity & Timer (HT) module. All recorded data is downloadable to any smart device via Bluetooth.

By using the next generation micro modules, you can customise the iCONsmart to suit your needs, whether that is with Timer, Humidity or Motion sensing functionality, you can mix and match them all.

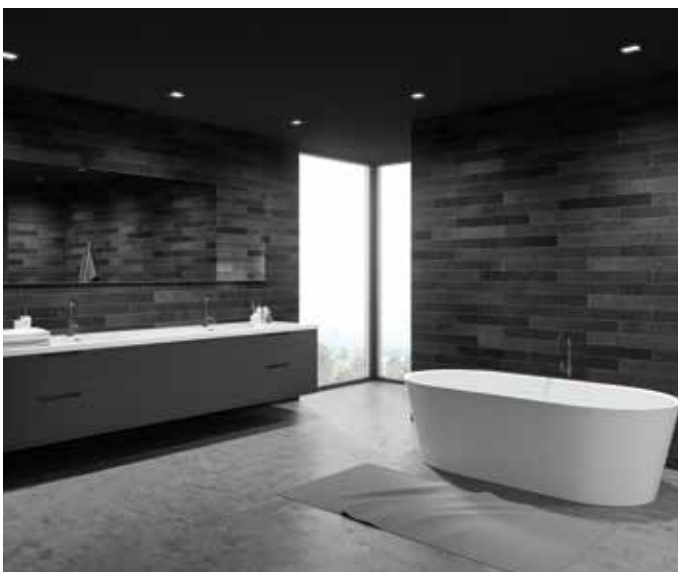

MODULES

| | | |
|----------|------|--|
| 72687224 | TM | Timer: Can be set to run between 2-45 min |
| 72687225 | HT | Humidity & Timer: Can be set between 35-95% RH |
| 72687226 | MST | Motion sensor & Timer: PIR activates fan |
| 72687227 | MSHT | Motion sensor with Humidity & Timer: See above |

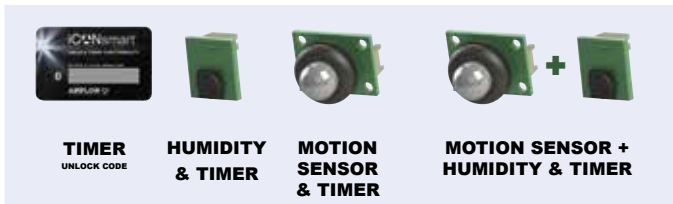

iCONsmart comes with a newly developed flow sensing technology that automatically adjusts and maintains the set extraction flow rates.



Download myAirflow



TECHNICAL DATA

| Specification | iCONsmart 30 |
|--|---------------------------------|
| Air flow (min-max) m ³ /h / l/s | 36 - 151 / 10 - 42 |
| Fan type | Axial |
| Mounting position | Wall / Ceiling |
| Sound pressure dB(A) @ 3 m | 26.3 |
| Power (W) | 4.7 |
| Specific Fan Power (W/l/s) from | 0.11 |
| Building regulations ADF | Yes |
| Duct diameter (mm) | 125 |
| Supply voltage | 110 - 240V AC / 1ph / 50 - 60Hz |
| Ingress protection rating | IPX5 |
| Max ambient temperature (°C) | 40 |
| Weight (kg) | 1 |
| Dimensions H x W x D (mm) | 246 x 246 x 123 |
| Part number | 72687222 |

APP

The iCONsmart can be commissioned and controlled via the myAirflow app. Available for iOS and Android.

- Humidity range sensitivity that can be adjusted accordingly.
- Run on timer function.
- Room refresh feature.
- Delay start feature.
- 3-month rolling log of usage data graphs with export feature.
- Overcome functionalities.
- Motion sensor activation.
- Silent hours feature.



Customisable fan name



Overcome functionalities by tapping the Amber Colour Button.




3-month rolling usage data log & export feature



Quick and easy registration



DIMENSIONS (mm)

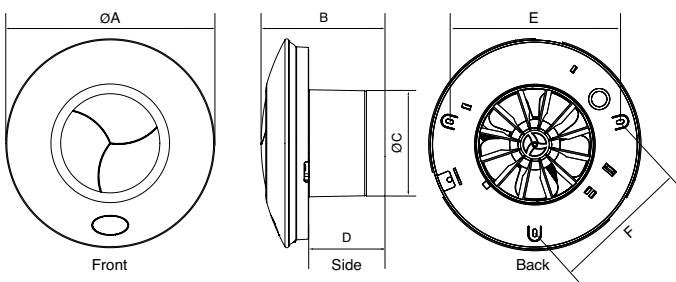


| Model | A | B | C | D | E | F |
|--------------|-----|-----|-----|----|-----|-----|
| iCONsmart 30 | 246 | 123 | 123 | 67 | 172 | 144 |

CONTROLS AND ACCESSORIES

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

Visit our website for more details.

PERFORMANCE

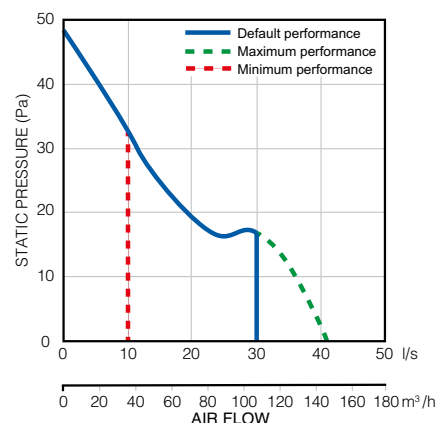

The inbuilt flow sensor gives you ultimate control. This graph shows the performance which can be set between 10 & 42 l/s (default 30 l/s). To find the available system pressure for your set flow rate, simply draw a line up from the Air flow l/s or m³/h until it joins the curve above, index across to the left for system pressure available pascals (Pa).



iCONsmart Basic

iCONsmart AVAILABLE FUNCTIONS WITHOUT INSTALLING ANY MODULES:

You have never been more in control of your indoor air quality than with the iCONsmart. As standard it includes:

- Bluetooth connection to your smart device
- Setting flow rates
- Commission and notification to NICEIC of an installation
- As standard (basic fan) 3 months rolling log of power consumption, Time on and flow rates recording.
- Customisable fan name
- Built in unlockable Timer Module
- View NICEIC registration details (Fan serial number, name, address)

By using the next generation Micro Modules, you can customise the iCONsmart to suit your needs, whether that is with Timer, Humidity or Motion Sensor functionality. The micro modules can be used in isolation or you can combine them to give more functionality.



TIMER CARD

Unique to your fan

The iCONsmart has a built in Timer Module in every fan. The Timer functionalities can be accessed by a unique unlock code found on a timer card, within the Timer Module carton. The unique code can be revealed by scratching off the cover on the card.

By unlocking the Timer functionalities, the user will have access to a wide range of functions and features; an adjustable Run on timer between 2 and 45 minutes, a Silent hours feature to keep the fan quiet, a Room refresh to keep the health of the room optimal and a Delay start to prevent disturbing the user when using the room for a quick visit.



Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request

