


Supervent

Kitchen ventilation

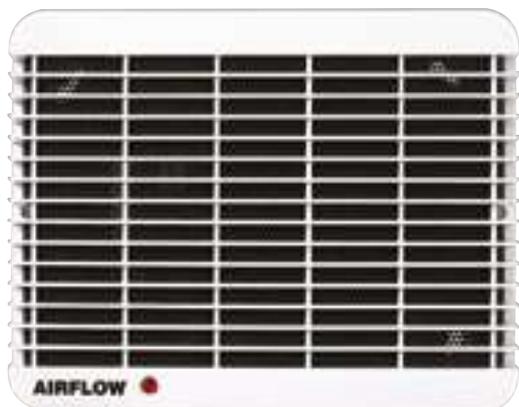

Key Features

- **Powerful centrifugal fan**
- **Flow rate up to 260 m³/hr**
- **Two speed versions available**
- **Recess or surface mounted into a wall or ceiling (bezel supplied)**
- **Window fitting with optional window kit**
- **Easy to clean, integral, re-usable grease filter**
- **Thermally protected motor**
- **Easy to fit with 100mm outlet**
- **Demco approved**
- **Integral magnetic backdraught flap**
- **IPX4 rating**
- **Complies with Building Regulations**
- **3 year warranty**

Supervent range

Highly reliable and powerful centrifugal fan in a modular design for ease of installation and maintenance. The Supervent is designed to provide extraction levels that comply with the latest Building Regulations.

Supervent fans are small in size but big in performance. This range of powerful fans provides compact units that are ideal for almost any kitchen application. A

centrifugal fan that is simple to install and exceptionally versatile, delivering 150mm fan performance levels through 100mm ducting. These are the ideal solution for removing damp moist air, odours and airborne pollutants from kitchens.

The washable, built-in grease filter protects the motor in kitchen applications.



Models

2 Speed Basic	Manual control by remote switch
Timer	Timer can be set to run on between 5 and 30 minutes Speed adjustment possible on the unit
Humidity Pull Cord	Humidity sensor adjustable between 40 and 90% RH with pull cord override




Technical Data

Specification	Supervent SV6	Supervent SV6T	Supervent SV6HP
Air flow m ³ /hr	68 / 245*	260	68 / 245 ¹⁰⁴
Air flow l/sec	19 / 68	72	19 / 68
Fan type	Centrifugal	Centrifugal	Centrifugal
Controls	2 Speed / Basic	Timer	Humidity / Pull Cord
Mounting	Wall/ Ceiling / Two Room	Wall / Ceiling / Two Room	Wall / Ceiling / Two Room
Sound Pressure dB(A)@3m	38 / 59	59	38 / 59
Power watts	20 / 90	20 / 90	20 / 90
Amps	2	2	2
Building Regulations ADF	Yes	Yes	Yes
Duct diameter (mm)	100	100	100
Voltage	230v / 1ph / 50Hz	230v / 1ph / 50Hz	230v / 1ph / 50Hz
Rating	IPX4	IPX4	IPX4
Material finish	ABS	ABS	ABS
Weight (kg)	2.90	2.90	2.90
Dimensions (H x W x D) mm	200 x 250 x 143	200 x 250 x 143	200 x 250 x 143
Part No.	71908801	72357001	71939302


* Single speed selectable +Two speed

Dimensions (mm)

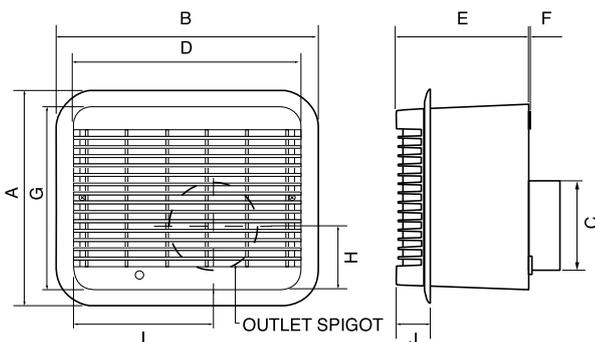

Model	A	B	C	D	E	F	G	H	I	J
Supervent	236	286	97	250	143	2	200	69	153	37

Performance

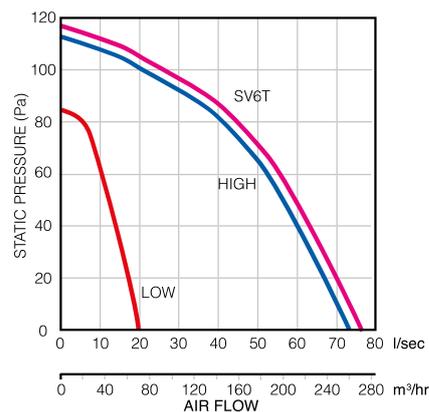

Controls and Accessories

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

See accessories section from page 209 for more details.