


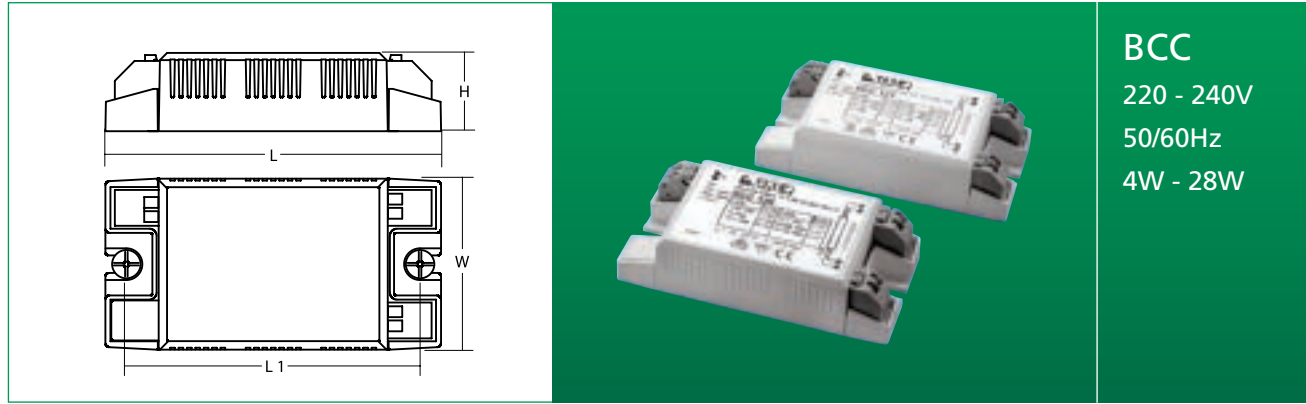

BCC
220 - 240V
50/60Hz
4W - 28W

- Compact size electronic ballast for built-in use
- Suitable for connection to emergency equipment in compliance with EN-60598-2-22
- Can be used for lighting equipment in protection Class I and II
- Sizes are compatible with mechanical ballast
- Push in connector with retaining springs. Connector cross section 0.5 - 1.5 mm²
- Input and output on opposite sides
- Start with pre-heating for longer lamp life (cut-off function)
- Protection against lamp disconnection (re-start with pre-heating), lamp failure or end of life
- Ballast can be secured with slots for M4 screws

Ballast Reference	Power W	Lamp	Cap	ta °C	tc °C	EEL Index	λ	Weight kg	Dimensions mm			
									W	H	L	L ₁
BCC 113*	6-8-11-13	T2	W4,3	-15 +55	75	A2	0.6	0.04	41	18	80	70
BCC 116*	4-6-8-13-14	T5	G5	-15 +55	75	A2	0.6	0.04	41	18	80	70
	16	T8	G13	-15 +55	75	A2	0.6	0.04	41	18	80	70
	5-7-9-11	TC-S/E	2G7	-15 +55	75	A2	0.6	0.04	41	18	80	70
	10	TC-D/E	G24q-1	-15 +55	75	A2	0.6	0.04	41	18	80	70
	10-16	TC-DD	Gr10q	-15 +55	75	A2	0.6	0.04	41	18	80	70
BCC 121*	14-21	T5	G5	-15 +55	80	A2	0.6	0.04	41	18	80	70
	13-18	TC-D/E	G24q-1/2	-15 +55	80	A2	0.6	0.04	41	18	80	70
	13-18	TC-T/E	GX24q-1/2	-15 +55	80	A2	0.6	0.04	41	18	80	70
BCC 122	22	T-R5	2GX13	-15 +55	85	A2	0.6	0.04	41	18	80	70
	21-28	TC-DD	Gr10q	-15 +55	85	A2	0.6	0.04	41	18	80	70
BCC 124*	24	T5	G5	-15 +55	85	A2	0.6	0.04	41	18	80	70
	14-15-18	T8	G13	-15 +55	85	A2	0.6	0.04	41	18	80	70
	18-24	TC-L	2G11	-15 +55	85	A2	0.6	0.04	41	18	80	70
	18-24	TC-F	2G10	-15 +55	85	A2	0.6	0.04	41	18	80	70
	22	T-R5	2GX13	-15 +55	85	A2	0.6	0.04	41	18	80	70
BCC 126*	24	T5	G5	-15 +55	85	A2	0.6	0.04	41	18	80	70
	24	TC-L	2G11	-15 +55	85	A2	0.6	0.04	41	18	80	70
	24	TC-F	2G10	-15 +55	85	A2	0.6	0.04	41	18	80	70
	26	TC-D/E	G24q-3	-15 +55	85	A2	0.6	0.04	41	18	80	70
	26	TC-T/E	GX24q-3	-15 +55	85	A2	0.6	0.04	41	18	80	70
	22	T-R5	2GX13	-15 +55	85	A2	0.6	0.04	41	18	80	70
BCC 128	28	T5	G5	-15 +55	85	A2	0.6	0.04	41	18	80	70

Approvals

EN-61347-2-3
EN-55015

EN-61547
EN-61000-3-2



*Approval pending