

ecoDRY

For use in washrooms



KEY FEATURES

- | Flow rates up to 52 l/s (187 m³/h)
- | IP23 rating
- | White ABS plastic, satin die cast aluminium or matte black steel
- | Automatic sensor operated
- | Very quick drying time of 10-15 seconds
- | Noise levels from 68db(A) at 2 m
- | Blue LED downlighting when in use
- | Air speed from 250 km/h
- | Only 2.3 W per drying cycle (ecoDRY 550 only)
- | Agion® Silver Antimicrobial treated
- | 3-year warranty*

*Excludes motor brushes

Airflow are proud to present an Eco-Hygienic Drying System – the ecoDRY has double antibacterial protection as the internal plastic parts are treated with Agion® Silver Antimicrobial reducing bacteria on the dryer's surfaces.

ecoDRY offers superior performance in drying time at a very quick 10 – 15 seconds.

ecoDRY 550 cool air unit only consumes 2.3 W per drying cycle hence qualifying for Airflow's ecoair accreditation.

ecoDRY 1100 models have heating elements for those who prefer a conventional warm air drying system.

The product boasts a contemporary design with ergonomic features making it stand out from the competition – a drying system to aspire to for your wash room.

MODELS


White	ABS plastic
Satin Metal	Die cast aluminium
Matte Black	Steel



TECHNICAL DATA

Specification	ecoDRY 550 White	ecoDRY 550 Satin Metal	ecoDRY 550 Matte Black	ecoDRY 1100 White	ecoDRY 1100 Satin Metal	ecoDRY 1100 Matte Black
Function	Automatic Sensor					
Material	ABS	Die Cast Aluminum	Steel	ABS	Die Cast Aluminum	Steel
Colour	White	Satin Metal	Matte Black	White	Satin Metal	Matte Black
Absorption Heating Element	N/A			550 W		
Absorption Motor	550 W / 2.3 W per drying cycle			550 W		
Total Power	550 W			1100 W		
Air Speed	250 km/h			325 km/h		
Fan speed	26000 r.p.m.			30000 r.p.m.		
Air Flow Performance	126 m ³ /hr / 35 l/s			187 m ³ /hr / 52 l/s		
Drying Time	10 - 15 sec					
Noise Level (at 2 m)	68dB(A)			75dB(A)		
Protection Rating	IP23					
Electrical Insulation	Class II					
Certification	CE/UKCA					
Weight (Kg)	3.0	5.0		3.0	5.0	
Dimensions (H x W x D)mm	285 x 221 x 157					
Product Codes	90000242	90000243	90002162	90000518	90000519	90002163
EAN	5019009311937	5019009311944	5019009336558	5019009318806	5019009318813	5019009336565

DIMENSIONS

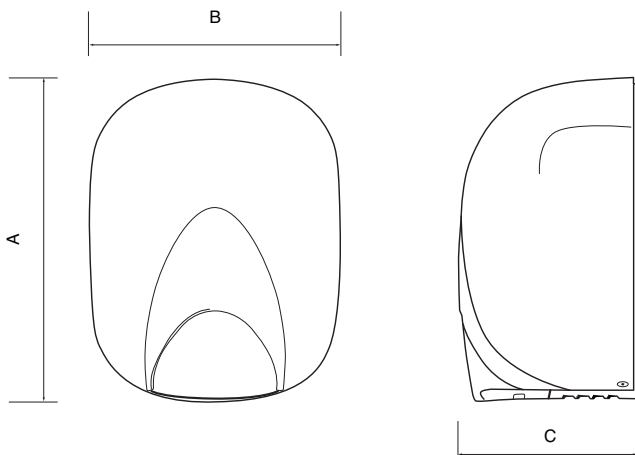


Model	A	B	C
ecoDRY	285	221	157

FLOW MECHANISM



CONTROLS & ACCESSORIES

ISOLSW-NE
No: 90000538



Single gang two pole latching modular isolation switch (on/off) with a red neon indicator in a smooth, polar white finish.

EV200-WH-P
No: 9020154



Ø200mm plastic, adjustable extract valve regulates the exit of air from the room - White.

AVS200
No: 90000361



Mixed flow fan. Suitable for Domestic and Light Commercial Facilities. Quiet and powerful, high performance up to 283 l/s.

ICON 60 FAN
No: 72591701



ICON 60 is ideal for larger bathrooms and residents lounges. Recessed into the wall or ceiling.

Replacement carbon brushes are available on request from your ecoDRY stockist or visit: airflow.com

Call: 01494 525252

Visit: airflow.com


AIRFLOW

Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80001588 - Issue 1 04/24