

DUPLEXbase PT 2800

DUPLEXbase PT



PERFORMANCE

Fans		Supply Air	Extract Air
Air volume @200Pa	m³/hr / l/sec	2800 / 778	2800 / 778
Nominal voltage	V	230	230
Power input (at operation point)	kW	0.74	0.67
Max power input	kW	0.83	0.83
Max current	A	4	4
SFP	W/l/s	0.95	0.86
Fan type		EC	EC

Note: The figures above have been measured at 2800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

The unit consist of fans equipped with the EC technology. These fans have modulating speed control throughout the marked area.

Heat Recovery		Supply Air	Extract Air
Air volume @200Pa	m³/hr / l/sec	2800 / 778	2800 / 778
Temperature at inlet	°C	-5	20
Temperature at outlet	°C	16	3
Humidity at inlet	% RH	90	40
Humidity at outlet	% RH	20	100
Heat recovery efficiency winter / summer	%	84 / 79	
Performance in winter / summer	kW	20.2 / 4.6	
Condensation	l/h	4.4	
Type of heat exchanger		Counterflow, Plastic	
Part No.		90001428	

Note: The figures above have been measured at 2800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

Sound Power Level LwA (dB)	Total	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	dB (A)	
	Extract	Supply									
Outdoor air e1	56	41	40	52	50	51	40	28	<25		
Supply air e2	84	56	62	82	77	74	71	65	59		
Extract air i1	56	41	39	53	49	50	39	28	<25		
Exhaust air i2	84	56	61	83	76	73	69	63	58		
Breakout noise	69	48	55	63	66	60	57	50	34		
Sound Pressure Level LpA (dB) measured at 3m	48	27	34	42	45	39	37	29	<25		

Note: The figures above have been measured at 2800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.


KEY FEATURES

- Air volume up to 2800 m³/h at 200 Pa according to ErP 2018
- Excellent thermal efficiency, up to 90%
- Compact design and high flexibility in unit orientation
- Low SFP with energy saving EC fans
- Low noise, refer to NR35 and BB93 standards
- Excellent thermal insulation (class T2, TB1)
- 100% adjustable digital controller with Internet and BMS connection
- BREEAM, Part L, Volume 2 and ErP 2018 compliant
- 2 year warranty+


OPTIONAL FEATURES

- Modulating control based on flow (constant flow function)
 - Modulating control based on pressure (0-10V input)
 - Pre and post-heating coils
 - Cooling coils
 - CO₂ monitors
- More options available using our Duplexvent selection software.

AIR FLOW CURVE

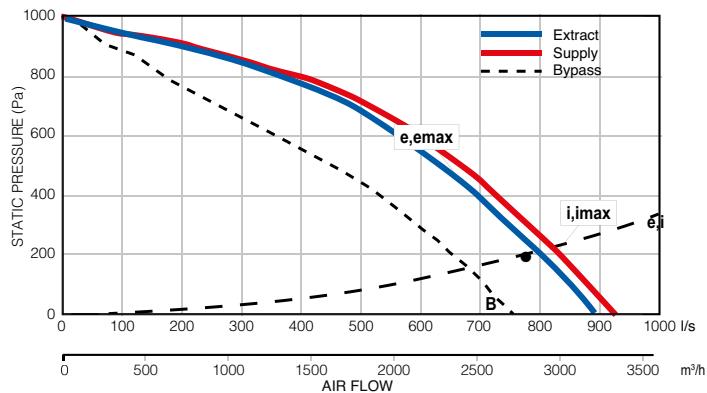


POWER CONSUMPTION

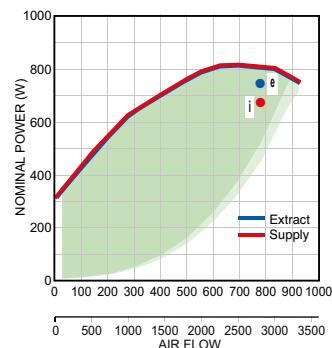

Note: Green area denotes power consumption range. Power consumption depends on system installation.


+excludes motors. Motor warranty one year from date of purchase.

HEAT RECOVERY EFFICIENCY

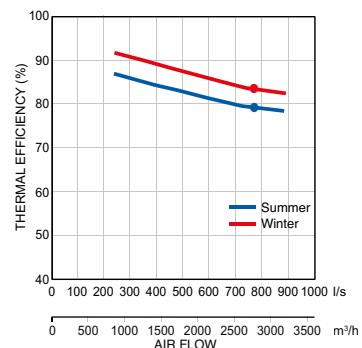


Winter Operation:

e1 - outdoor air (ODA)
e2 - supply air (SUP)
i1 - extract air (ETA)
i2 - exhaust air (EHA)

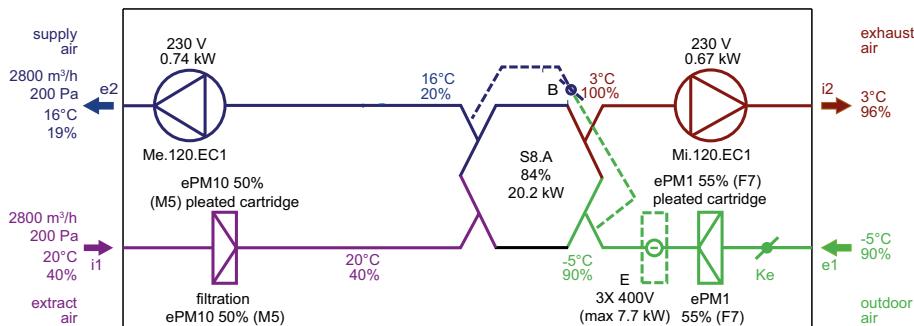

Note: AHU functions diagram. Inlet and outlet location may differ from actual position and port configuration.

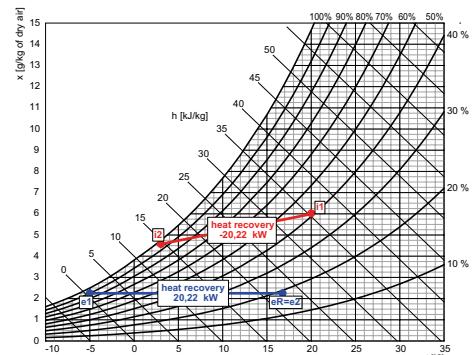

Supply


	Description	t [°C]	RH [%]
e1	Outdoor Air	-5.0	90
eR	Heat Recovery	16.5	19

Exhaust


	Description	t [°C]	RH [%]
i1	Extract Air	20.0	40
i2	Heat Recovery	3.1	96

Summer Operation:

e1 - outdoor air (ODA)
e2 - supply air (SUP)
i1 - extract air (ETA)
i2 - exhaust air (EHA)

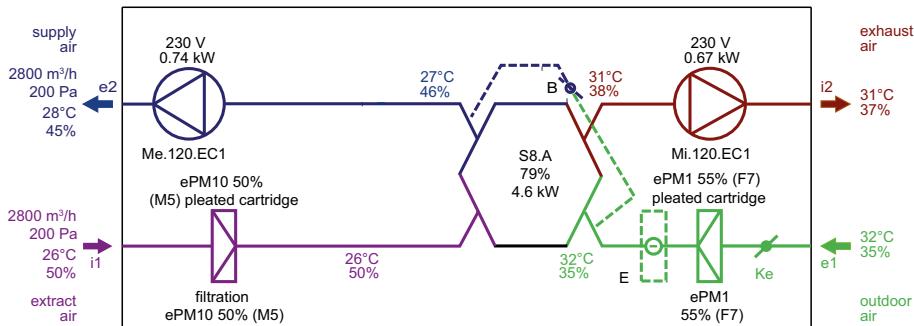

Note: AHU functions diagram. Inlet and outlet location may differ from actual position and port configuration.

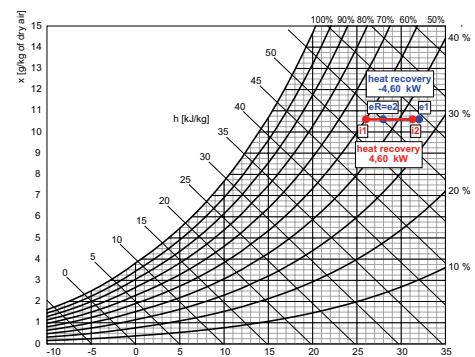

Supply

	Description	t [°C]	RH [%]
e1	Outdoor Air	32.0	35
eR	Heat Recovery	27.9	45

Exhaust

	Description	t [°C]	RH [%]
i1	Extract Air	26.0	50
i2	Heat Recovery	31.3	37



DUPLEXbase PT 2800

DUPLEXbase PT

OPTIONAL ACCESSORIES

PRE-HEATING


Electric pre-heater		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	2800 / 778
Max. heating capacity	kW	6.9
Voltage	V	400
Heating coil type		built-in



Electric pre-heater		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	2800 / 778
Max. heating capacity	kW	10.5
Voltage	V	400
Connection ports	mm	250 x 500
Heating coil type		external

POST HEATING

Electric post-heater		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	2800 / 778
Temperature at inlet (upstream of heater)	°C	16.0
Temperature at outlet (downstream of heater)	°C	19.0
Heating capacity	kW	3.44
Max. heating capacity	kW	6.9
Voltage	V	400
Heating coil type		built-in

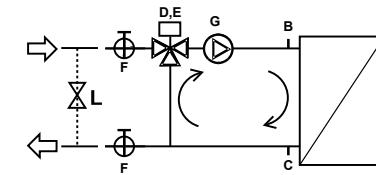

- B Sludge valve plug
B Sludge valve plug
C Sludge valve plug

Hydraulic kit: RE-HW3.LM24A-SR

IVAR.MIX4, Kv 12, 1"
LM24A-SR
1" female
WILO YONOS PARA RS 20/6- RKC

Others

L Water bypass

1 - Delivered separately

2 - Fitted and connected

3 - Not part of delivery, recommended

2)
2)
2)

1)




1)

1)

1)

1)

3)

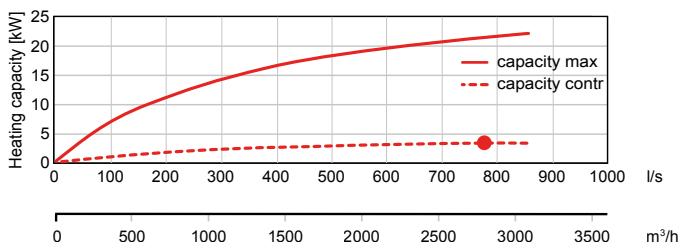

Electric post-heater		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	2800 / 778
Temperature at inlet (upstream of heater)	°C	16
Temperature at outlet (downstream of heater)	°C	20
Heating capacity	kW	3.4
Max. heating capacity	kW	10.5
Voltage	V	400
Connection ports	mm	250 x 500
Heating coil type		external

Note: The figures to the left have been measured at 2800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

DUPLEXbase PT 2800


DUPLEXbase PT

OPTIONAL ACCESSORIES

POST HEATING continued

Water heating coil	Supply Air	
Air volume @200Pa	m ³ /hr / l/sec	2800 / 778
Temperature at inlet (after heat recovery)	°C	16
Temperature at outlet (downstream of heater)	°C	20
Heating capacity	kW	3.4
Heating medium temperature drop	°C	70 / 22
Medium flow (from source)	l/h	60
Medium-side pressure drop in heat exchanger / in valve	kPa	1.10 / 0.62
Connection dimension (hydraulic kit)		1" female
Coil capacity	l	3.5
Heating coil type		external

Note: The figures to the left have been measured at 2800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

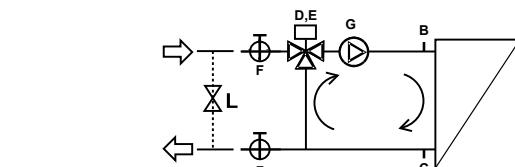

B Sludge valve plug
C Sludge valve plug

Hydraulic kit: RE-HW3.LM24A-SR

IVAR.MIX4, Kv 12, 1"

LM24A-SR

1" female

WILO YONOS PARA RS 20/6- RKC

2)
2)

1)

1)

1)

1)


Others

L Water bypass

1 - Delivered separately

2 - Fitted and connected


3 - Not part of delivery, recommended

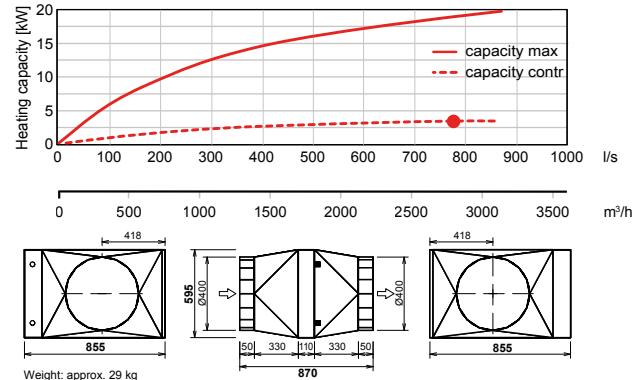

COOLING

Water cooling coil	Supply Air	
Air volume @200Pa	m ³ /hr / l/sec	2800 / 778
Temperature at inlet (after heat recovery)	°C	27
Temperature at outlet (downstream of cooling coil)	°C	16
Inlet relative humidity (after heat recovery)	% RH	46
Outlet relative humidity (downstream the cooling coil)	% RH	85
Cooling capacity	kW	11.7
Condensate production	l/h	2
Water temperature drop	°C	6 / 11
Medium flow (at max. capacity)	l/h	2350
Medium-side pressure drop in heat exchanger / in valve	kPa	24.80 / 0.60
Connection dimension		1" female
Coil capacity	l	4.6
Heating coil type		built-in

Note: The figures to the left have been measured at 2800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

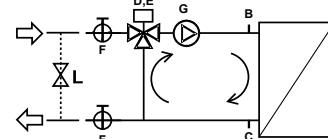

B Sludge valve

plug

C Sludge valve

plug

Hydraulic kit: R-CW3.TR 24-SR

R320BM, Kv 21,3/4"

TR 24-SR

1" female

2)
2)

1)

1)

Others

G Pump


L Water bypass

K Coil water/ethylene glycol

1 - Delivered separately

2 - Fitted and connected


3 - Not part of delivery, recommended

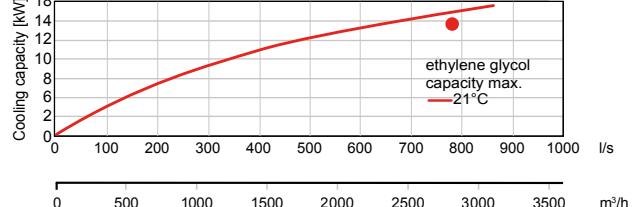

DX COIL

DX coil		Supply Air
Air volume @200Pa	m ³ /hr / l/sec	2800 / 778
Temperature at inlet (after heat recovery)	°C	27
Temperature at outlet (downstream of cooling coil)	°C	16
Inlet relative humidity (after heat recovery)	% RH	46
Outlet relative humidity (downstream the cooling coil)	% RH	79
Cooling capacity	kW	13.31
Condensate production	l/h	5
Refrigerant type		R32
Evaporating temperature	°C	7
Coil capacity	l	3.9
Heating coil type		built-in


COOLING CAPACITY

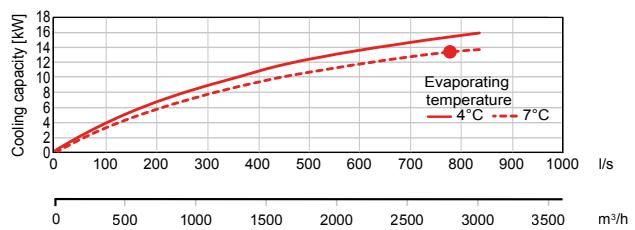

Note: The figures above have been measured at 2800 m³/h and 200 Pa. Please use the Duplexvent Selection Software to calculate measurements at other performance levels.

DIMENSIONS

AHU size length 2150 mm
height (without AHU feet) 1600 mm
depth 1055 mm
Weight approx. 518 kg

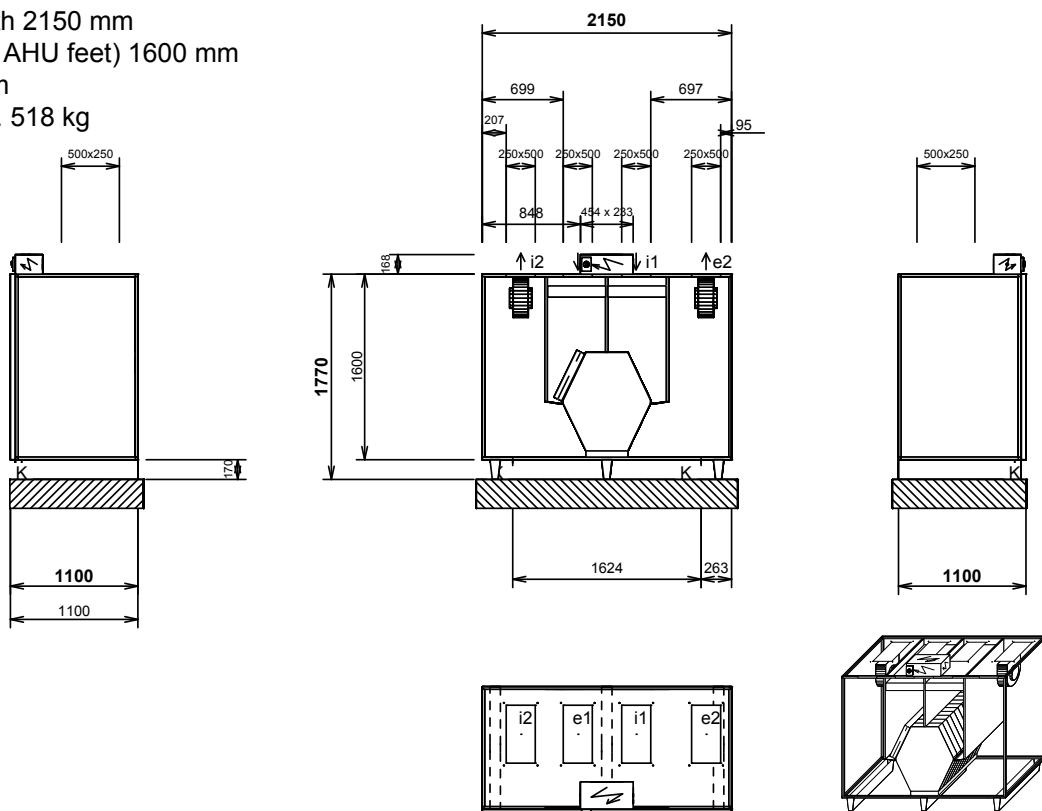

Connections	Type	Dimensions	Optional components
e1	e1- outdoor air (ODA)	250 x 500 mm	4x M6 thread for 20 mm flange
e2	e2- supply air (SUP)	250 x 500 mm	4x M6 thread for 20 mm flange
i1	i1- extract air (ETA)	250 x 500 mm	4x M6 thread for 20 mm flange
i2	i2- exhaust air (EHA)	250 x 500 mm	4x M6 thread for 20 mm flange
K	condensate drain	2x Ø 16 mm / 22 mm	

Notice:

- Door – 2 parts
- Diagram is intended only for basic information, binding dimensions receive at device delivery, or on request from the manufacturer.
- Bolt holes for duct connection (for one port): 4x M6

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252
airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request

80001154 – Issue 1 02/23

