


Model. MSLRRM21CB

Metal dual RCD split load consumer unit MCB - 21WAY 80A, 63A RCD 12MCB

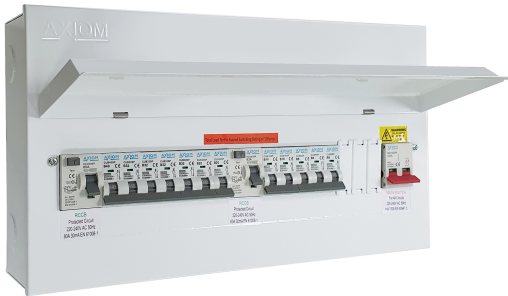

Features & Benefits

- 21 way main switch board
- New modern user friendly design with centralised back keyhole for quick and easy installation.
- Spirit level for correct wall mounting
- Steel drop down solid cover to protect against dust and retard fire entry.
- Separate earth and neutral terminal at the top for easy wiring and identification.
- Generous internal cabling space above RCBO's (for time saving wiring).
- Easy out-to-in knockouts all round for trucking entry and wall mounting.
- Full metal steel casement construction for safety and to impede fire entry.
- Conforms to IEC 61439-3 BS 7671

Safety Information

IMPORTANT - Before undertaking any work on or maintenance of fitting:-

- Switch off power supply and allow sufficient time to cool before handling
- Do not dispose of decommissioned fitting in household waste
- Dispose of fitting in the appropriate section of your local civic amenity site or recycling centre only

Technical Specifications

General Information	
Product Colour/Finish	White
Dimensions (mm)	433x237x110mm
Ingress Protection (IP)	IP20
Electrical	
Rated Voltage	230 - 240V
Frequency (Hz)	50Hz
Sensitivity	30mA
Performance Data	
Specifications	Board-BSEN61439-3 MCB-IEC60898 RCD-IEC61008
Isolator	100A DP Isolator
RCD	1x63A 30mA, 1x80A DP 30mA
Filled with MCB	3x6A, 2x16A, 2x20A, 4x32A, 1x40A
Approvals	RoHS, CE
Construction	
Warranty Years	1Yr
Body Material	Metal Clad
Knockouts	32-20-20-25-32
Number of ways	21 way
Number of free ways	3
Other	
Applications	Domestic, commercial applications