

Maxivent eco

Larger bathroom, utility room and kitchen



KEY FEATURES

- Axial fan
- High performance fan up to 260 m³/h
- Easy to fit and clean
- Can be mounted in the wall or ceiling
- Interchangeable fixing holes to easily replace most other 150 mm fans
- Variable speed controller available
- Thermally protected motor
- Low Watt motor 28 W
- Low SFP - 0.38 W/l/s
- Silent automatic shutter
- IP45 rating
- Complies with Building Regulations
- 3 year warranty

Maxivent eco range

Highly reliable and powerful axial fan in a modular design for ease of installation and maintenance. Maxivent is designed to provide extraction levels that comply with the latest building regulations.

Maxivent fans offer quiet powerful performance in units equipped with auto shutters. These stylish, modern 150 mm axial fans will blend comfortably with existing décor and are quick and easy to install. They are the ideal solution for removing damp moist air, odours and airborne pollutants from kitchens and utility rooms.

Available with a range of control options; pull cord models enable local activation of the fan via the use of an integral pull cord; timer models include an adjustable timer overrun between 1 and 30 minutes when activated and deactivated using an external switch; humidity models activate the fan when the humidity level reach the adjustable targets between 40 and 95% RH.



MODELS

Pull Cord	Activated by pull cord
Timer	Adjustable timer overrun between 1 and 30 minutes
Humidity Pull Cord	Adjustable Humidity 40 to 95% RH with adjustable timer and pull cord




TECHNICAL DATA

Specification	Maxivent eco P	Maxivent eco T	Maxivent eco H
Air flow m ³ /h	260	260	158 / 260
Air flow l/s	72	72	44 / 72
Fan type	Axial	Axial	Axial
Controls	Pull Cord	Timer	Humidity / Pull Cord
Mounting	Wall / Ceiling	Wall / Ceiling	Wall / Ceiling
Sound pressure dB(A)@3 m	57	57	46/57
Power Watts	28	28	28
Amps	2	2	2
SFP@72 l/s	0.38	0.38	0.38
Building Regulations ADF	Yes	Yes	Yes
Duct diameter (mm)	150	150	150
Voltage	230 V / 1 ph / 50-60 Hz	230 V / 1 ph / 50-60 Hz	230 V / 1 ph / 50-60 Hz
Rating	IP45	IP45	IP45
Weight (kg)	2.45	2.45	2.45
Dimensions (H x W x D) mm	225 x 225 x 105	225 x 225 x 105	225 x 225 x 105
Part No.	72678201	72678301	72678401
Variable speed controller	9041033*	9041033*	


* refer to accessories section.

DIMENSIONS (mm)

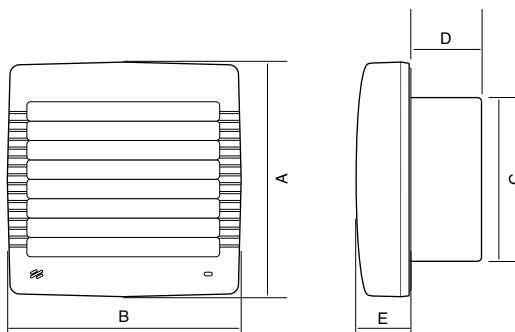

Model	A	B	C	D	E
Maxivent eco	225	225	150	60	45

PERFORMANCE

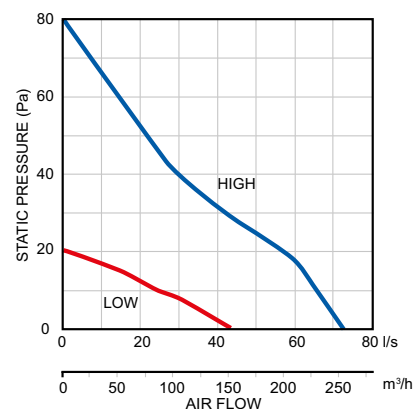

CONTROLS AND ACCESSORIES

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

See accessories section for more details.

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80001319 - Issue 1 01/23