

Aventa Silent

Domestic and light commercial facilities



Key Features

- In-Line mixed flow fan
- High performance characteristics - powerful air flow (up to 1020 m³/hr) and high pressure
- Sound insulated casing - ensures quiet operation
- Compatible with ducting 100 - 200mm dia
- Energy efficient 2 speed motors
- IPX4 rating
- Complies with Building Regulations
- 2 year warranty

Aventa Silent

The durable external casing is made of polymer coated steel. The inner casing perforation let's sound waves pass through the holes and fall at a specific angle to the sound absorbing layer. The casing is internally heat and sound insulated with a 50mm mineral layer and the conic impeller with special blade profiling increases air flow speed and provides higher pressure.

The diffuser, specially profiled impeller and directing vanes at the outlet from the fan casing distribute air flow in such a way as to attain the best combination of performance and pressure at low noise levels.

The fans can be mounted at any place or angle within the ductwork. Several fans can be installed in parallel in the same system to achieve a higher air capacity or in series to achieve higher pressure.

Recommended as a component of an air handling systems for commercial and industrial premises where noise levels need to be kept to a minimum, for example, libraries, conference rooms, educational institutions and crèches.



Models


Basic Control by optional switch (switch not included)




Technical Data

Specification	Aventa Silent AVS100	Aventa Silent AVS125	Aventa Silent AVS150	Aventa Silent AVS200
Air flow m ³ /hr	170 / 240	230 / 340	405 / 555	810 / 1020
Air flow l/sec	47 / 67	64 / 94	112 / 154	225 / 283
Fan type	Mixed Flow	Mixed Flow	Mixed Flow	Mixed Flow
Controls	Basic	Basic	Basic	Basic
Mounting	In-Line	In-Line	In-Line	In-Line
Sound Pressure dB(A)@3m	24 / 29	23 / 28	26 / 33	31 / 36
Power watts	24 / 26	25 / 30	45 / 52	78 / 110
Amps	0.10 / 0.11	0.11 / 0.13	0.20 / 0.23	0.35 / 0.49
Building Regulations ADF	Yes	Yes	Yes	Yes
Duct diameter (mm)	100	125	150	200
Voltage	230v / 1ph / 50Hz	230v / 1ph / 50Hz	230v / 1ph / 50Hz	230v / 1ph / 50Hz
Rating	IPX4	IPX4	IPX4	IPX4
Material finish	Polymer Coated Steel	Polymer Coated Steel	Polymer Coated Steel	Polymer Coated Steel
Weight (kg)	4.6	4.6	6.1	8
Dimensions (H x W x D) mm	237 x 505 x 243	237 x 474 x 243	260 x 580 x 274	295 x 550 x 386
Part No.	90000358	90000359	90000360	90000361

Performance

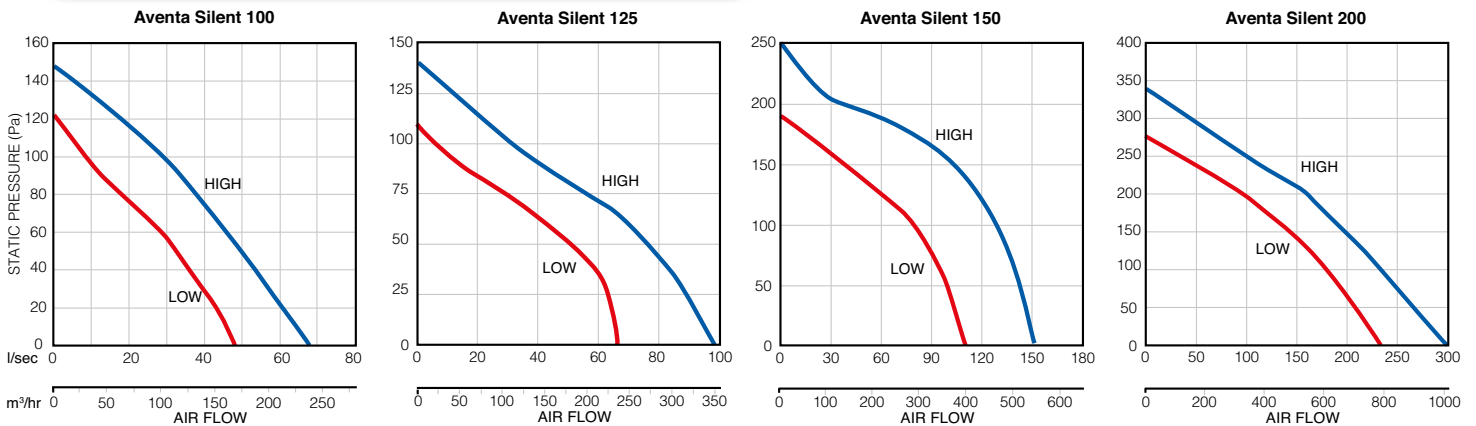

Dimensions (mm)

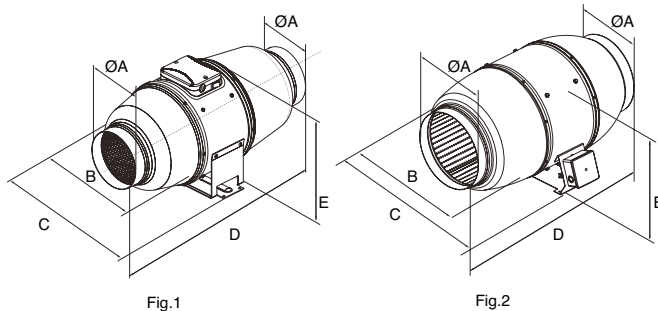

Model	ØA	B	C	D	E	Figure no
AVS100	98	215	243	505	237	1
AVS125	123	215	243	474	237	1
AVS150	147	247	274	580	260	1
AVS200	198	293	386	550	295	2

Controls and Accessories

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

Call: 01494 560800

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request.

