




DISCUS DOWNLIGHTS

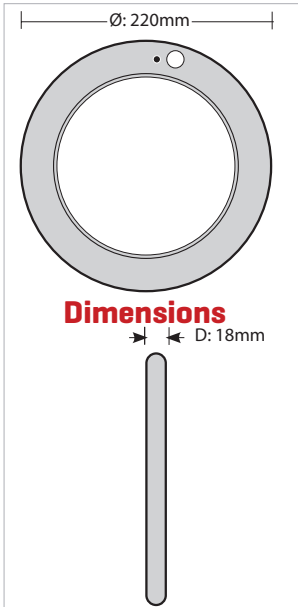


| CODE | DESCRIPTION | LUMEN OUTPUT | LM/W | CRI | POWER FACTOR | DIMENSIONS (Ø X D MM) | WEIGHT (KG) |
|---------------|--|-----------------|----------|-----|--------------|-----------------------|-------------|
| DSC18D-40 | 18W Dimmable 4000K DISCUS Downlight | 1450lm | 81 | >80 | >0.9 | 220 x 18 | 0.37 |
| DSC1018-40 | 10W/15W/18W 4000K DISCUS Downlight | 950/1350/1500lm | 95/90/83 | >80 | >0.5 | 220 x 18 | 0.36 |
| DSC1018PIR-40 | 10W/15W/18W 4000K DISCUS Downlight with PIR Sensor | 950/1350/1500lm | 95/90/83 | >80 | >0.5 | 220 x 18 | 0.36 |
| DSCBZ-S | Silver Bezel for DISCUS Downlight | - | - | - | - | 220 x 18 | 0.05 |
| DSCPZ-S | PIR Silver Bezel for DISCUS Downlight | - | - | - | - | 220 x 18 | 0.05 |

Additional Information

DISCUS is a smart, sleek range of fittings, available in dimming, wattage selectable & wattage selectable with PIR sensor. All have an adjustable bracket to enable installation into existing cut-outs of 65-205mm or surface mount.



- Lifetime 25000hrs
- Material PS Diffuser, PC & Aluminium Body
- 30cm Cable included
- Optional Silver Bezel attachment
- Wattage selectable option with 10W/15W/18W selector switch
- PIR option time delay 30 or 180 seconds
- Light sensor option with ambient light setting and sensor on/off switch





DISCUS DOWNLIGHTS

**Photometric Light
Distribution Curve**



| Automatic Circuit Breaker Type [ACB] | B6 | B10 | B13 | B16 | B20 | C10 | C13 | C16 | C20 |
|--------------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Rated current [Ampere] | 6A | 10A | 13A | 16A | 20A | 10A | 13A | 16A | 20A |
| Cable Size [mm ²] | 1.5mm ² | 1.5mm ² | 1.5mm ² | 1.5mm ² | 2.5mm ² | 1.5mm ² | 1.5mm ² | 1.5mm ² | 2.5mm ² |
| DSC18D-40 | 60 | 100 | 100 | 100 | 160 | 100 | 100 | 100 | 160 |
| DSC1018-40 & DSC1018PIR-40 [10W] | 60 | 105 | 105 | 105 | 175 | 105 | 105 | 105 | 175 |
| DSC1018-40 & DSC1018PIR-40 [15W] | 41 | 70 | 70 | 70 | 118 | 70 | 70 | 70 | 118 |
| DSC1018-40 & DSC1018PIR-40 [18W] | 35 | 60 | 60 | 60 | 100 | 60 | 60 | 60 | 100 |

Suitable Dimmers

- AU-DSP250 & AU-DSP400X - Aurora
- DM400AP - BG
- DPD-LED - Danlers
- DV21911 - Crabtree
- M0400 - Zano
- VFR400 - Knightbridge
- V-PRO - Varilight