

Aventa In-line Plus

Bathroom, en-suite, utility room and kitchen ventilation



KEY FEATURES

- In-Line mixed flow fan with flow rate up to 68 l/s (245 m³/h)
- High pressure, low noise
- Two speed (normal and boost)
- Adjustable Run on Timer version available
- Low Watt motor from 23 W
- IPX4 rating
- 2 year warranty

The Aventa range provides compact, quiet and powerful remote mounted ventilation for ducted installations. Available in high performance, two speed versions they are less bulky than larger in-line centrifugal fans and can be installed in loft spaces or service shafts for remote extraction.

With high flow / high pressure development characteristics they can be used with flexible ducting and flat duct systems to ensure compliance with Building Regulations guidance ensuring installed performance and extraction conditions are met.

Combining two Aventa fans allows for even more powerful operation. Mounting in parallel (left hand image on facing page) doubles the air flow, whilst two fans in series (right hand image on facing page) leads to a doubling of the air pressure for longer duct runs.

MODELS


Basic	Control by Remote Switch
Timer	Adjustable timer overrun between 2 and 30 minutes



TECHNICAL DATA

Specification	Aventa Plus 100	Aventa Plus 100T	Aventa Plus 125	Aventa Plus 125T
Air flow m³/h	180 / 245		240 / 350	
Air flow l/s	50 / 68		67 / 97	
Fan type	Mixed Flow			
Controls	Basic	Timer	Basic	Timer
Mounting	In-Line			
Sound pressure dB(A)@3 m	27 / 32		29 / 34	
Power Watts	23 / 25		25 / 29	
Amps	0.10 / 0.11		0.11 / 0.13	
Building Regulations ADF	Yes			
Duct diameter (mm)	100		125	
Voltage	230 V / 1 ph / 50 Hz			
Rating	IPX4			
Material finish	Polypropylene			
Weight (kg)	1.75			
Dimensions (H x W x D) mm	226 x 196 x 303		226 x 196 x 303	
Part No.	90002367	90002368	90002369	90002370
EAN	5019009340272	5019009340289	5019009340296	5019009340302


DIMENSIONS (mm)




Model	Ø D	B	H	L
Aventa In-line Plus 100 / 100 T	97	196	226	303
Aventa In-line Plus 125 / 125 T	123	196	226	259

Double the flow - mount in parallel

Double the pressure - mount in series



PERFORMANCE

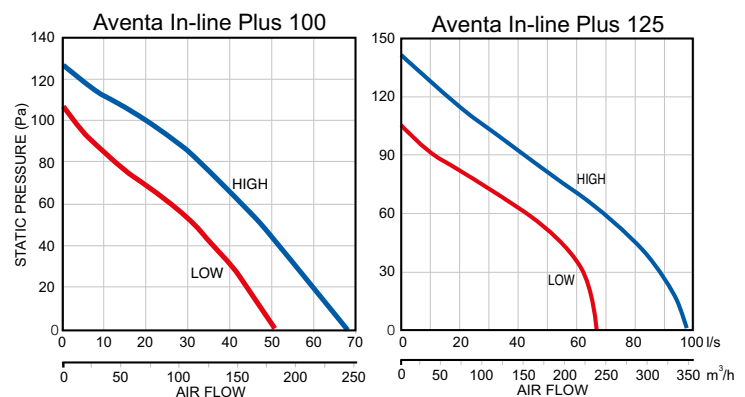

CONTROLS & ACCESSORIES



Others products available from airflow.com

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request

