

FXBX EXIT BOX



Legend sold separately.



VARIANTS AVAILABLE: SELF-TEST / DALI-2

- 90lm downlight
- Individual LED optics for uniform illumination
- BESA fixings and 20mm conduit entry
- 8 year warranty including battery
- Remote control compatible
- Pre-commissioning feature via REM-E1




Part Number	Description	Viewing Distance	Output	Optic	Beam Angle
FXBXS-M-3-N	Exit Box - Self-test*	34m	90lm	Opal Diffuser	55 x 49°
FXBSDL-M-3	Exit Box - DALI-2*	34m	90lm	Opal Diffuser	55 x 49°

*Legend supplied separately.

NOTE: Self-test luminaires are configured to manual test mode by default. If self-test mode is required, it should be activated via remote control.

DIMENSIONS

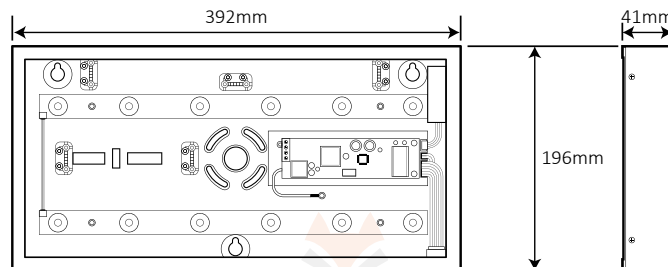

Technical Data	FXBXS-M-3-N	FXBSDL-M-3
Rated Supply Voltage	220-240V AC	220-240V AC
Mains Frequency	50 / 60 Hz	50 / 60 Hz
Max. Power Consumption	5W	5W
Standby Power	<0.5W	<0.5W
Emergency Output Power	1.5W	1.5W
Rated Emergency Duration	3hrs*	> 3hrs
Battery Charge Time	8hrs (Initial up to 16hrs)	20hrs
Operational Temperature	0°C to 40°C	0°C to 40°C
Storage Temperature	0°C to 50°C	0°C to 50°C
Insulation Class	I	I
Ingress Protection	IP20	IP20
Impact Protection	IK06	IK06
Battery Type	1 x 18650 Li-ion 3.6V 2.5Ah	1 x 18650 Li-ion 3.6V 2.5Ah
Battery Code	FXC3.6-2500-B80	FXC3.6-2500-B80

*To optimise long-term battery performance, the luminaire will operate for 3 hours before automatically shutting down.

Logistics Information	FXBXS-M-3-N	FXBSDL-M-3
Product Dimensions	392 x 41 x 196mm	392 x 41 x 196mm
Net Weight	0.97kg	0.98kg
Box Dimensions	415 x 45 x 210mm	415 x 45 x 210mm
Gross Weight	1.08kg	1.10kg
Box Qty	8pcs	8pcs
Carton Dimensions	430 x 240 x 365mm	425 x 250 x 365mm
Carton Weight	9.15kg	9.25kg
Commodity Code	9405423990	9405423990

Materials

Housing	Polycarbonate / steel
Finish	Matt
Colour	White
Screws	Nickel Steel

LED Light Source

Type	2835
Colour Temp.	4000K
CRI	>80
LED Lifetime	50,000 hrs

SELF-TEST

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Charging
Fast Flash	Off	Function test or duration Test in progress
Off	On	Battery disconnected / Duration test failed
Slow Flash	Slow Flash	Battery temp. out of operational range
Off	Slow Flash	Light source fault

DALI-2

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Duration test in progress
Fast Flash	Off	Function test in progress
Off	On	Battery temp. out of operational range
Off	Slow Flash	Battery disconnected / Duration test failed
Off	Fast Flash	Battery low voltage.
Off	Off	Emergency function in operation
Alternating G > R > G...		DALI-2 identifying code

ACCESSORIES

REMOTE CONTROL



REM-E1	
Dimensions	117 x 38 x 13mm
Gross Weight	0.03kg
Commodity Code	85437003
● Infrared remote control for all Fox Lux self-test luminaires, modules and remote packs. ● Batteries not included, requires 2 x AAA. <i>(NOT COMPATIBLE WITH DALI-2 PRODUCTS.)</i>	

EXIT BOX LEGENDS



FFBX-D/R/L/U	
Dimensions	388 x 193 x 2mm
Viewing Distance	34m
Gross Weight	0.15kg
Commodity Code	94059200
● Interchangeable legends for Fox Lux Exit Box.	

